


Node has no record for E, so request is forwarded to parent


Node knows about E, so request is no longer forwarded

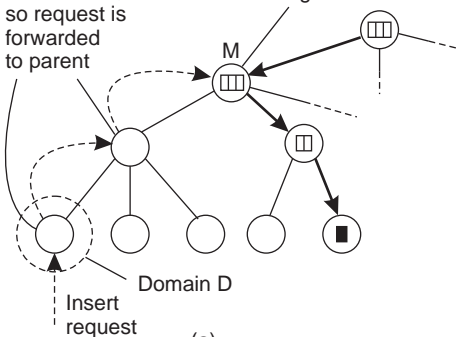

(a)

Node creates record and stores pointer

Node creates record and stores address

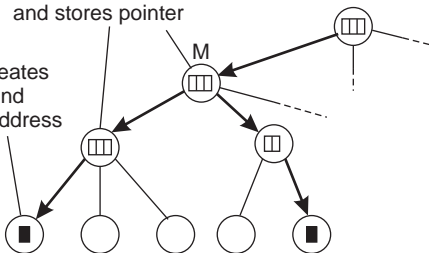

(b)